

**Family**  
 BLAST CHILLERS AND FREEZERS

**Section**  
 BLAST CHILLERS 8 GN1/1

**Model**  
 MRCM081S

**Code**  
 CR0518761

### BLAST CHILLER MIXED TEMPERATURE 8 GN 1/1

Blast Chilling mixed temperature from + 90°C to +3°C/from +90°C to -18°C. Tray capacity 8 x GN 1/1 distance between trays 65 mm. Full lenght side tray (530 mm.) insertion. Blast chiller with electronic control, extractable tray holder. Air cooled unit, refrigerant gas R404A. Right hinged door with magnetic gasket and self-closing hinge, easy operating and washable evaporator with hinged opening deflector. Bottom tray to collect washing and condense water, removable front condensing unit grid for ease of cleaning. Output per cycle kg. 25 from +90° C to +3° C / kg.16 from +90°C to -18°C. Equipped with core temperature probe.



#### Technical data

|                    |             |                        |
|--------------------|-------------|------------------------|
| Width mm:          | 790         | Internal dim. oven mm: |
| Depth mm:          | 800         | Oven capacity:         |
| Height mm:         | 1320        | Oven power kW:         |
| Weight kg.:        | 120.00      | Qty heating zones:     |
| Volume m³:         | 1.10        | Plate dim. mm:         |
| Power supply:      | VAC230 50Hz | Dim. heating zone mm:  |
| Gas power kW:      |             | Qty tank:              |
| Electric power kW: | 2.10        | Tank dim. mm:          |
|                    |             | Tank capacity l:       |


**Family**  
BLAST CHILLERS AND FREEZERS

**Section**  
BLAST CHILLERS 8 GN1/1

**Model**  
MRCM081S

**Code**  
CR0518761

## BLAST CHILLER MIXED TEMPERATURE 8 GN 1/1

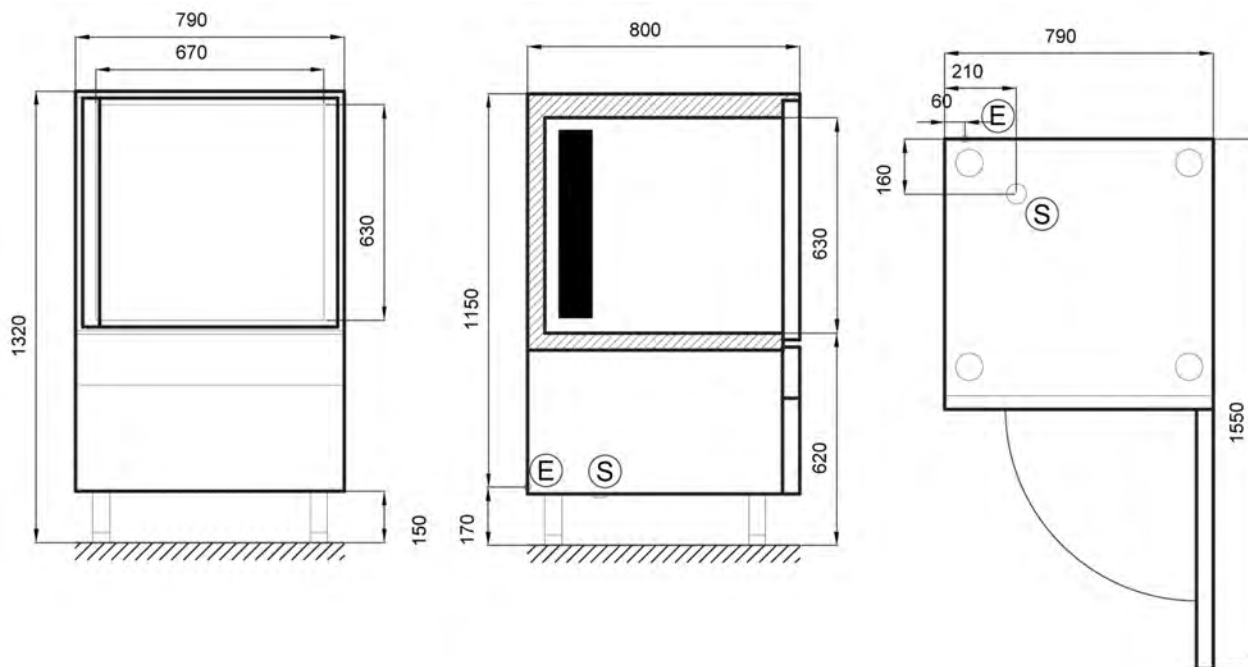

### Legend

(E) Socket 1: Connection supply terminal H=100mm. Spare cable 1500mm

(E) Socket 2:

(G) Gas:

(AD) Softened water:

(AF) Cold water:

(AC) Hot water:

(S) Draining: With tray

(FR) In e out freon:

(V) Steam: